SCH 30
Self Contained Ice Machine 34 kg

Item	
Project	
Quantity	



FEATURES

- Resistant stainless steel exterior.
- Low power and water consumption
- Reduced dimensions
- Optimum ratio between ice production and bin capacity
- R290 refrigerant



SCH M
Medium Gourmet 20 g
Ø 30 mm - H 34 mm

CONDENSING SYSTEM

water cooled
air cooled

REFRIGERANT GAS

R290

VOLTAGE V/HZ/PH

230\50\1

Model	Cube	Ø	H	Weight
SCH M	Medium	30 mm	34 mm	20 g

CERTIFICATIONS

OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.


www.simag.it

Self Contained Ice Machine 34 kg

May 2025

SCH 30
Self Contained Ice Machine 34 kg

Item	
Project	
Quantity	

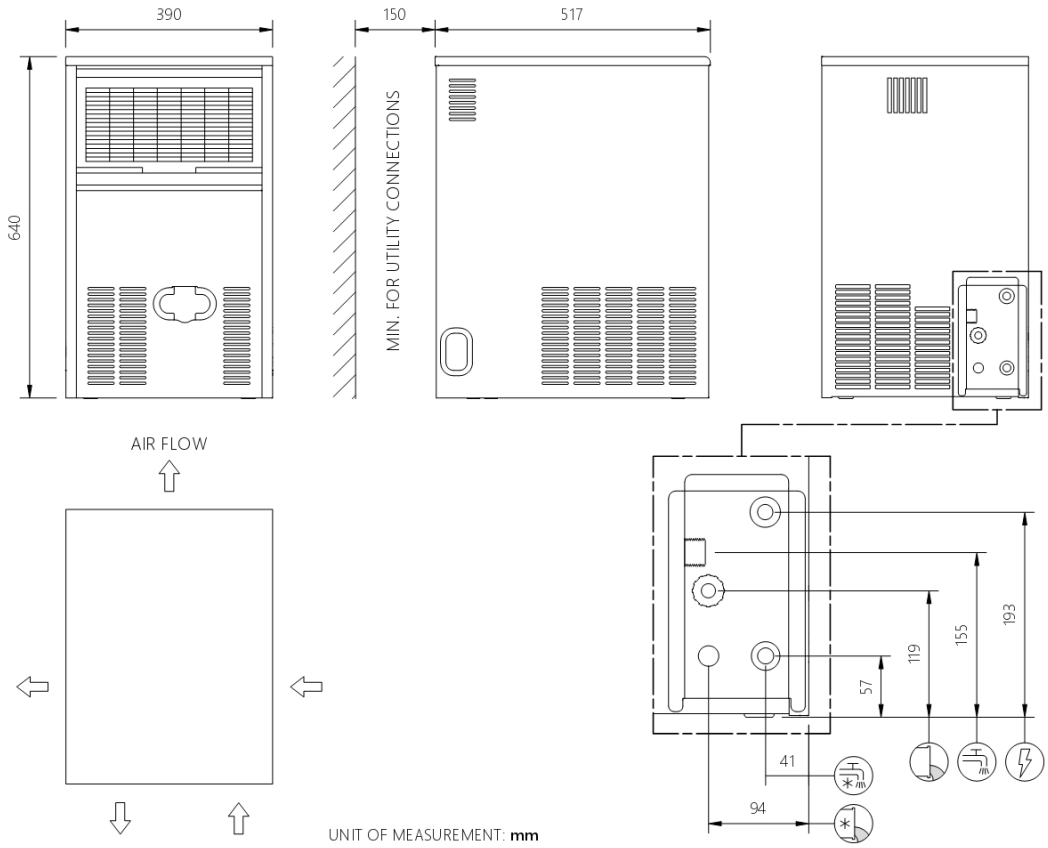

UNIT DATA		SHIPPING DATA		
Size (W x D x H)	390 x 515 x 638 mm	Size (W x D x H)	460 x 580 x 760 mm	(*) Data refer to 32°C Amb. / 21°C Water temperature conditions
Net weight	32 kg	Gross weight	38kg	

			24 h ice production kg C Amb. / °C Water			Cap bin	Heat Rejection	Energy Consumption (*)	Water Usage (*)	instant power	circuit wires	Max. Fuse Size
Version	Voltage	Condensation	10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kg	kW	kWh/ 24h	l/h	W	No. x Ømm2	A
SCH 30 WS	230\50\1	W	34	33	28	8.5	0,6	6	29	275	3 x 1,5	10
SCH 30 AS	230\50\1	A	31	29	25	8.5	0,5	7	4	340	3 x 1,5	10

Self Contained Ice Machine 34 kg